

1/3

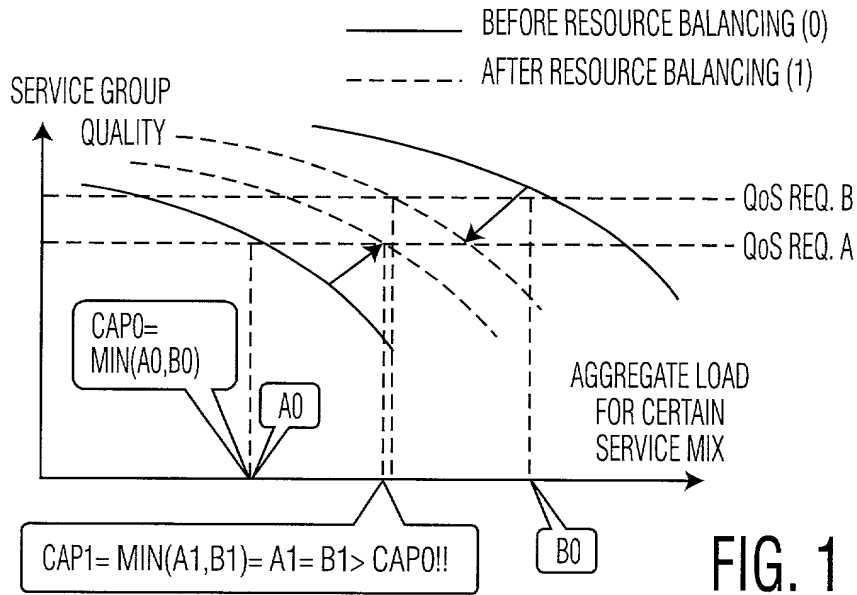


FIG. 1

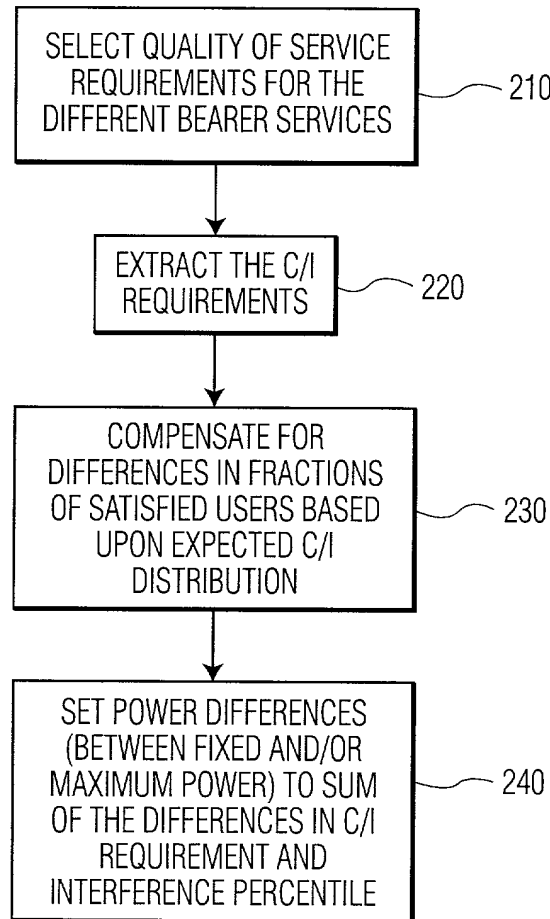


FIG. 2

2/3

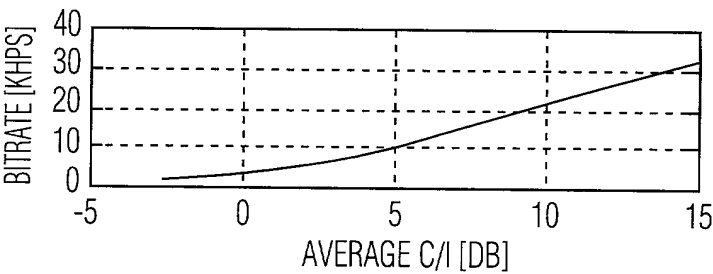


FIG. 3A

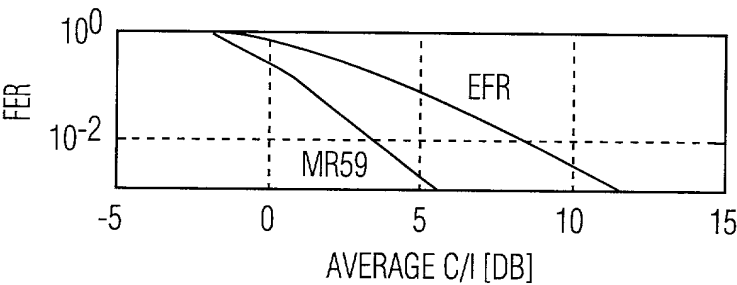


FIG. 3B

VOICE QUALITY AND C/I REQUIREMENT	INTERACTIVE DATA QUALITY (PER TS) AND C/I REQUIREMENT	5TH - 10TH PERCENTILE DIFFERENCE	POWER OFFSET
EFR 1% FER 8dB C/I	10 KBPS/5dB	3dB	8-5+3=6dB
	15 KBPS/7dB		8-7+3=4dB
	20 KBPS/9dB		8-9+3=2dB
MR59 0.6% FER 4dB C/I	10 KBPS/5dB		4-9+3=2dB
	15 KBPS/7dB		4-9+3=0dB
	20 KBPS/9dB		4-9+3=-2dB

FIG. 4

3/3

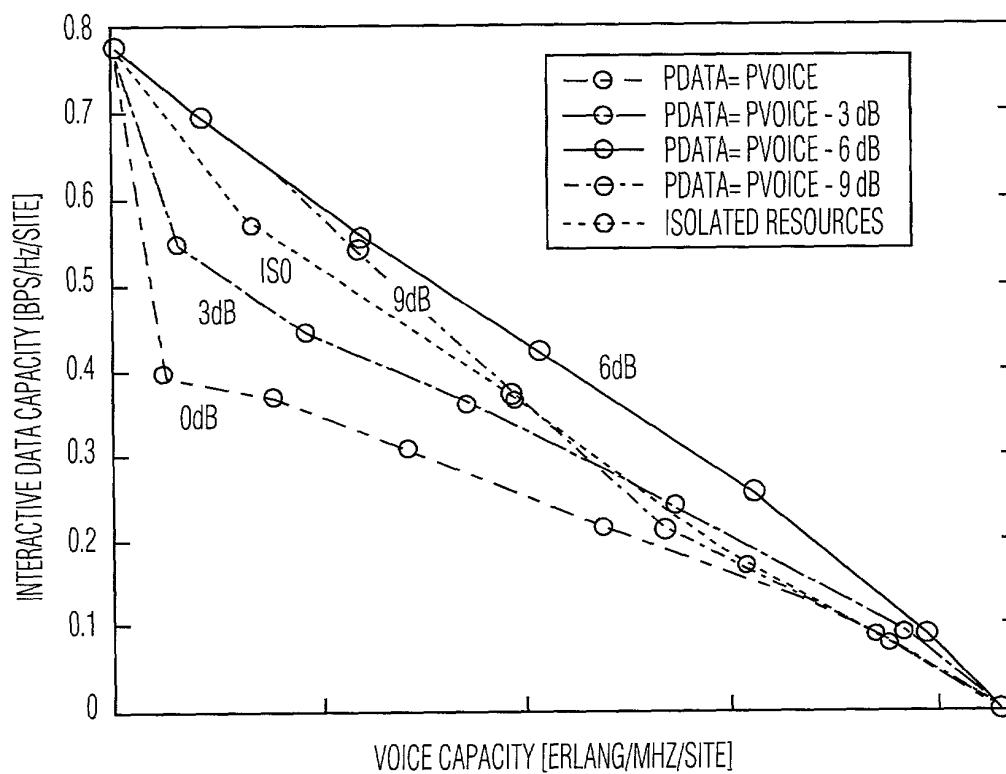


FIG. 5